

RK-HD-KM01 Harley-Davidson Light Combo Kit

Installation Manual for Harley-Davidson Touring Models



BEFORE YOU START Park on level ground, turn off the ignition, disconnect the negative battery terminal, and let components cool before installation.

Safety Information



- Park the vehicle on a level surface and engage the parking brake.
- Turn off the ignition and remove the key before installation.
- Disconnect the negative battery terminal to prevent electrical short circuits.
- Please wait until the bulbs and housings have completely cooled before handling them.

Tools Required

- Socket wrench set
- Phillips and flathead screwdrivers
- Trim removal tool
- Pliers (optional)
- Torque wrench

Wiring Diagram

Match each wire by function. Secure every connection before testing the vehicle lights.

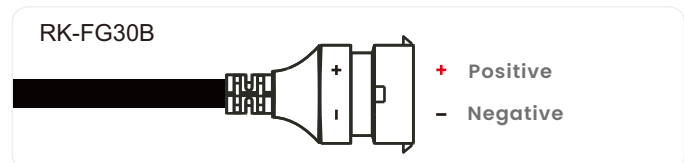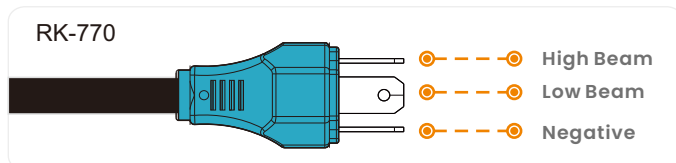

FITMENT

- 1994-1995 Electra Glide Road King FLHR
- 1994-2013 Electra Glide Classic FLHTC
- 1995-1997 Ultra Classic Electra Glide FLHTCU
- 1995-2004 Ultra Classic Electra Glide EFI FLHTCUI
- 1995-2009 Electra Glide Standard FLHT
- 1995-2013 Electra Glide Classic FLHTC

- 1994-2014 Road King
- 1995-2017 Heritage Softail Classic FLSTC
- 1996-2006 Road King EFI FLHRI
- 1998-2006 Road King Classic EFI FLHRCI
- 1999-2002 Electra Glide Classic EFI FLHTCI
- 2000-2017 Fat Boy FLSTF...

Visit 4x4rockcats.com for the complete fitment list.

PRODUCT WARNINGS

Use only with 12 V DC input. The light may become hot during continuous use. Avoid burns and allow cooling before service.

QUICK TROUBLESHOOTING

Issue: Flickering/intermittent light - check ground and plug connection.
Issue: No illumination - confirm 12 V input and battery connection.

**THANK YOU FOR CHOOSING
4x4 ROCKCATS!**

support@4x4rockcats.com
RK-HD-KM01 Installation Guide | Page 1



HOW TO INSTALL



RK-770



1

Turn off the engine and disconnect the battery. Remove the existing headlight from the headlamp nacelle and keep all hardware that attaches the headlights to the vehicle.

2

Unplug the connector of the existing headlight. Plug in the headlight H4 plugs. Test these lights to make sure they work well before you put back the hardware.

3

Position the new headlight into the headlight housing. Reinstall the trim ring or retaining hardware. Tighten all screws securely and verify proper headlight alignment.

RK-FG30B



1

Remove the retaining screws from the original fog light.

2

Remove the original fog light assembly and disconnect the factory connector.

3

Connect the new fog light to the factory wiring connector. Install the new fog light and tighten the screws securely. Test the lights for proper operation.